




# ASI STORAGE SOLUTIONS INC.

4444 Delp Street Memphis, TN 38118  
 Tel: 901-312-6195 Fax: 901-312-6197  
 Website: [www.asilockers.com](http://www.asilockers.com)  
 E-mail: [info@asilockers.com](mailto:info@asilockers.com)

**TRADITIONAL  
COLLECTION**

**SINGLE TIER**

DATE ISSUED: 08-08

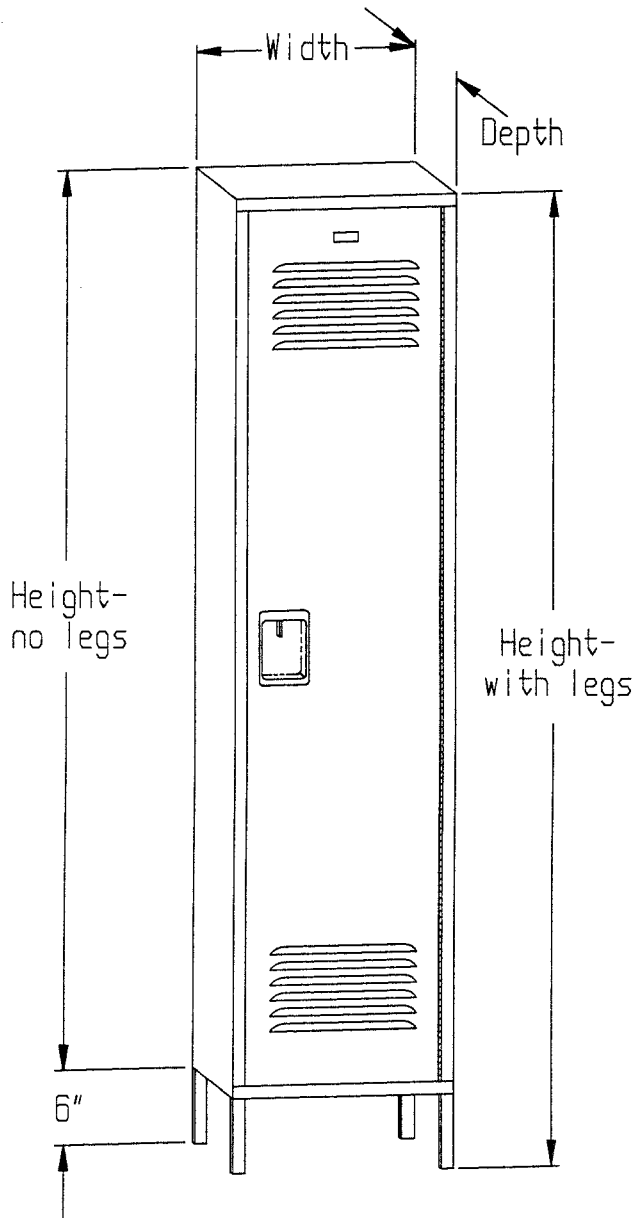

**HEIGHT WITH LEGS**

WIDTH	DEPTH	42	54	66	78
12	12				
12	15				
12	18				
15	15	N/A	N/A		
15	18	N/A	N/A		
18	18	N/A	N/A		

**HEIGHT - NO LEGS**

WIDTH	DEPTH	36	48	60	72
12	12				
12	15				
12	18				
15	15	N/A	N/A		
15	18	N/A	N/A		
18	18	N/A	N/A		



# ASI STORAGE SOLUTIONS INC.

4444 Delp Street Memphis, TN 38118  
Tel: 901-312-6195 Fax: 901-312-6197  
Website: [www.asilockers.com](http://www.asilockers.com)  
E-mail: [info@asilockers.com](mailto:info@asilockers.com)

**TRADITIONAL  
COLLECTION**

**SINGLE TIER**

DATE ISSUED: 08-08

## SPECIFICATION

**Material** - All major steel parts shall be of mild cold rolled commercial quality steel.

**Finish** - All material shall be power washed and phosphate treated for maximum finish color adhesion. All components shall be finished with a hybrid epoxy/polyester powder, electrostatically applied to ensure uniform thickness and baked to cure.

**Construction** - All lockers shall be built on a unit principle with common intermediate uprights separating units.

**Door Frames** - Shall be 16 gauge formed in a channel shape. Vertical members shall have additional flange to provide a continuous door strike. Cross frame members shall also be 16 gauge channel shaped.

**Doors** - Shall be 16 gauge with louvers for ventilation, channel shaped on both the lock and hinge side, with angle formations across the top and bottom.

**Body** - Bottoms shall be 16 gauge. Tops, sides, backs and shelves shall be 24 gauge. Bolt spacing shall not exceed 9" o.c.

**Hinges** - Shall be full length 16 gauge continuous piano type riveted to both door and frame.

**Handles** - Shall be one-piece 20 gauge deep drawn stainless steel cup designed to accommodate locks.

**Latching** - The lifting trigger shall be 14 gauge steel, attached to the latching channel. The trigger shall have a padlock eye for use with 9/32" diameter padlock shackle. Doors to have latch clip engaging frame at three points on doors over 42" high and two points on all other doors. Locking device to be positive automatic type, whereby locker door may be locked when open, then closed without unlocking. A rubber silencer shall be firmly secured to the frame at each latch hook.

**Interior Equipment** - Lockers 48" or higher shall be equipped with a shelf. If under 18" deep, locker shall have three wall hooks and one ceiling hook. Lockers 18" deep or more shall have a coat rod instead of a ceiling hook. Lockers 15" and 18" wide shall have four wall hooks and one ceiling hook.

**Number Plates** - Each locker shall have a polished aluminum number plate riveted to door face with black numerals 1/2" high.

**Color** - Doors and exposed body parts shall be selected from ASI's standard designer color range. Non-exposed body parts shall be finished in #03 Almond.

**Assembly** - All locker components shall be assembled with rivets.

**Installation** - Lockers shall be installed in accordance with ASI's installation instructions and shall be level and plumb with flush surfaces and rigid attachment to anchoring surfaces.