




# ASI STORAGE SOLUTIONS INC.

4444 Delp Street Memphis, TN 38118  
 Tel: 901-312-6195 Fax: 901-312-6197  
 Website: [www.asilockers.com](http://www.asilockers.com)  
 E-mail: [info@asilockers.com](mailto:info@asilockers.com)

**COMPETITOR  
 COLLECTION**

**SINGLE TIER**

DATE ISSUED: 08-08

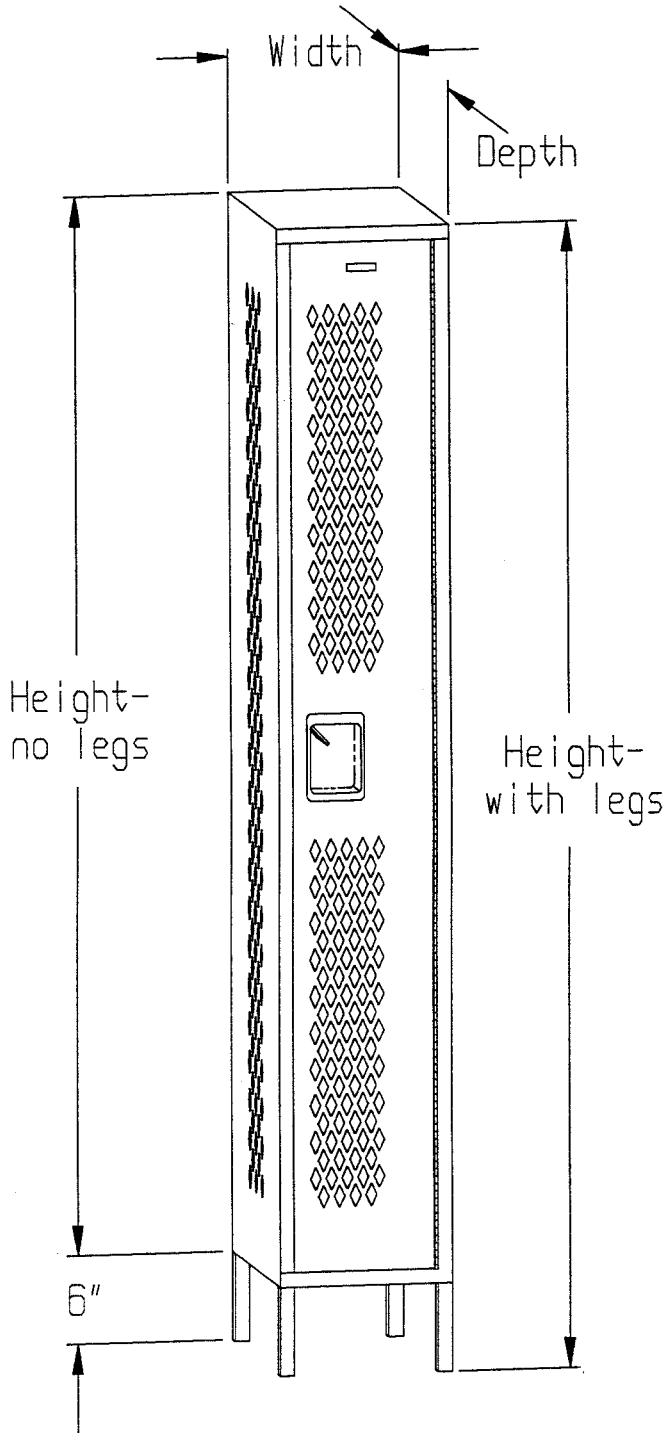

WIDTH	DEPTH	HEIGHT WITH LEGS	
		66	78
12	12		
12	15		
12	18		
15	15		
15	18		
18	18		
18	21		
18	24		
24	21		
24	24		

WIDTH	DEPTH	HEIGHT NO LEGS	
		60	72
12	12		
12	15		
12	18		
15	15		
15	18		
18	18		
18	21		
18	24		
24	21		
24	24		



# ASI STORAGE SOLUTIONS INC.

4444 Delp Street Memphis, TN 38118  
Tel: 901-312-6195 Fax: 901-312-6197  
Website: [www.asilockers.com](http://www.asilockers.com)  
E-mail: [info@asilockers.com](mailto:info@asilockers.com)

**COMPETITOR  
COLLECTION**

**SINGLE TIER**

DATE ISSUED: 08-08

## SPECIFICATION

**Material** - All major steel parts shall be of mild cold rolled commercial quality steel.

**Finish** - All material shall be power washed and phosphate treated for maximum finish color adhesion. All components shall be finished with a hybrid epoxy/polyester powder, electrostatically applied to ensure uniform thickness and baked to cure.

**Construction** - All lockers shall be built on a unit principle with common intermediate uprights separating units.

**Door Frames** - Shall be 16 gauge formed in a channel shape. Vertical members shall have additional flange to provide a continuous door strike. Cross frame members shall also be 16 gauge channel shaped.

**Doors** - Shall be 14 gauge, channel shaped on both the lock and hinge side, with angle formations across the top and bottom. Locker doors shall have a 16 gauge full height reinforcement channel.

**Ventilation** - Locker sides and door shall be perforated with diamond-shaped openings 3/4" wide X 1-1/2" high in a quantity and pattern to ensure maximum ventilation and maintain structural strength

**Body** - Backs shall be 18 gauge; all other body parts shall be 16 gauge. Bolt spacing shall not exceed 9" o.c.

**Hinges** - Shall be full length 16 gauge continuous piano type riveted to both door and frame.

**Handles** - Shall be one-piece 20 gauge deep drawn stainless steel cup designed to accommodate locks.

**Latching** - Lockers shall have an 11 gauge frame hook secured to the frame. The frame hook shall have a padlock hasp protruding through the recessed handle. A rubber silencer shall be firmly secured to the frame at each latch hook.

**Interior Equipment** - Lockers shall be equipped with a shelf. If under 18" deep, locker shall have three wall hooks and one ceiling hook. Lockers 18" deep or more shall have a coat rod instead of a ceiling hook. Lockers 15" wide and wider shall have four wall hooks and one ceiling hook.

**Number Plates** - Each locker shall have a polished aluminum number plate riveted to door face with black numerals 1/2" high.

**Color** - Doors, Frames, and all body parts shall be finished in same color.

**Assembly** - All locker components shall be assembled with rivets.

**Installation** - Lockers shall be installed in accordance with ASI's installation instructions and shall be level and plumb with flush surfaces and rigid attachment to anchoring surfaces.