




ASI STORAGE SOLUTIONS INC.

4444 Delp Street Memphis, TN 38118
 Tel: 901-312-6195 Fax: 901-312-6197
 Website: www.asilockers.com
 E-mail: info@asilockers.com

PRO COLLECTION

DATE ISSUED: 08-08

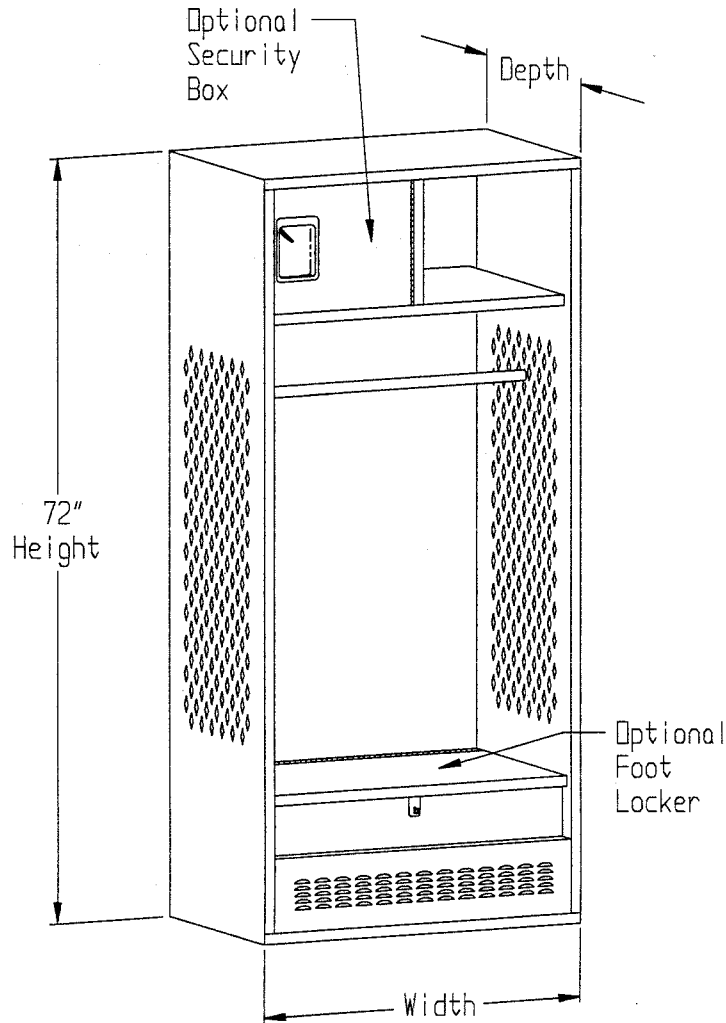

WIDTH	DEPTH	BASIC	with SECURITY BOX	with FOOT LOCKER	with SECURITY BOX & FOOT LOCKER
24	18				
24	21				
24	24				
33	18				
33	21				
33	24				



ASI STORAGE SOLUTIONS INC.

4444 Delp Street Memphis, TN 38118
Tel: 901-312-6195 Fax: 901-312-6197
Website: www.asilockers.com
E-mail: info@asilockers.com

PRO COLLECTION

DATE ISSUED: 08-08

SPECIFICATION

Material - All major steel parts shall be of mild cold rolled commercial quality steel.

Finish - All material shall be power washed and phosphate treated for maximum finish color adhesion. All components shall be finished with a hybrid epoxy/polyester powder, electrostatically applied to ensure uniform thickness and baked to cure.

Construction - All lockers shall be built on a unit principle.

Locker Frames - Shall be 16 gauge formed in a channel shape.

Ventilation - Open front; side shall be diamond perforated.

Body - Tops, bottoms, sides and shelves shall be 16 gauge; backs shall be 18 gauge. Bottoms shall have two welded reinforcement channels. Bolt spacing shall not exceed 9" o.c.

Interior Equipment - Locker shall have two wall hooks and one coat rod.

Number Plates - Each locker shall have a polished aluminum number plate riveted to door face with black numerals ½" high.

Color - All parts shall be finished in same color.

Assembly - All locker components shall be assembled with rivets.

Security Box - 14 gauge lockable door with a 16 gauge side panel. The door shall be attached to a welded frame with a continuous hinge. The hinge shall be mounted to door with aluminum rivets. The door shall have a recessed single point latch handle. Security box door frame members to be not less than 16 gauge formed to a channel shape. Vertical members shall have an additional flange to provide a continuous door strike.

Footlocker - Front footlocker panel shall include a single point latch with padlock strike plate and mini louvers. Footlocker top shall have a continuous hinge. Opening and closing shall be quieted by rubber bumpers mounted to the contact points. Seat shall be strengthened with two reinforcement channels welded to bottom of seat. Two side seat supports shall be fastened to side panels and inserted in a support tab on the front locker panel for added strength.

Installation - Lockers shall be installed in accordance with ASI's installation instructions and shall be level and plumb with flush surfaces and rigid attachment to anchoring surfaces.