




# ASI STORAGE SOLUTIONS INC.

4444 Delp Street Memphis, TN 38118  
 Tel: 901-312-6195 Fax: 901-312-6197  
 Website: [www.asilockers.com](http://www.asilockers.com)  
 E-mail: [info@asilockers.com](mailto:info@asilockers.com)

**TRADITIONAL PLUS  
 COLLECTION**

**DOUBLE TIER**

DATE ISSUED: 08-08

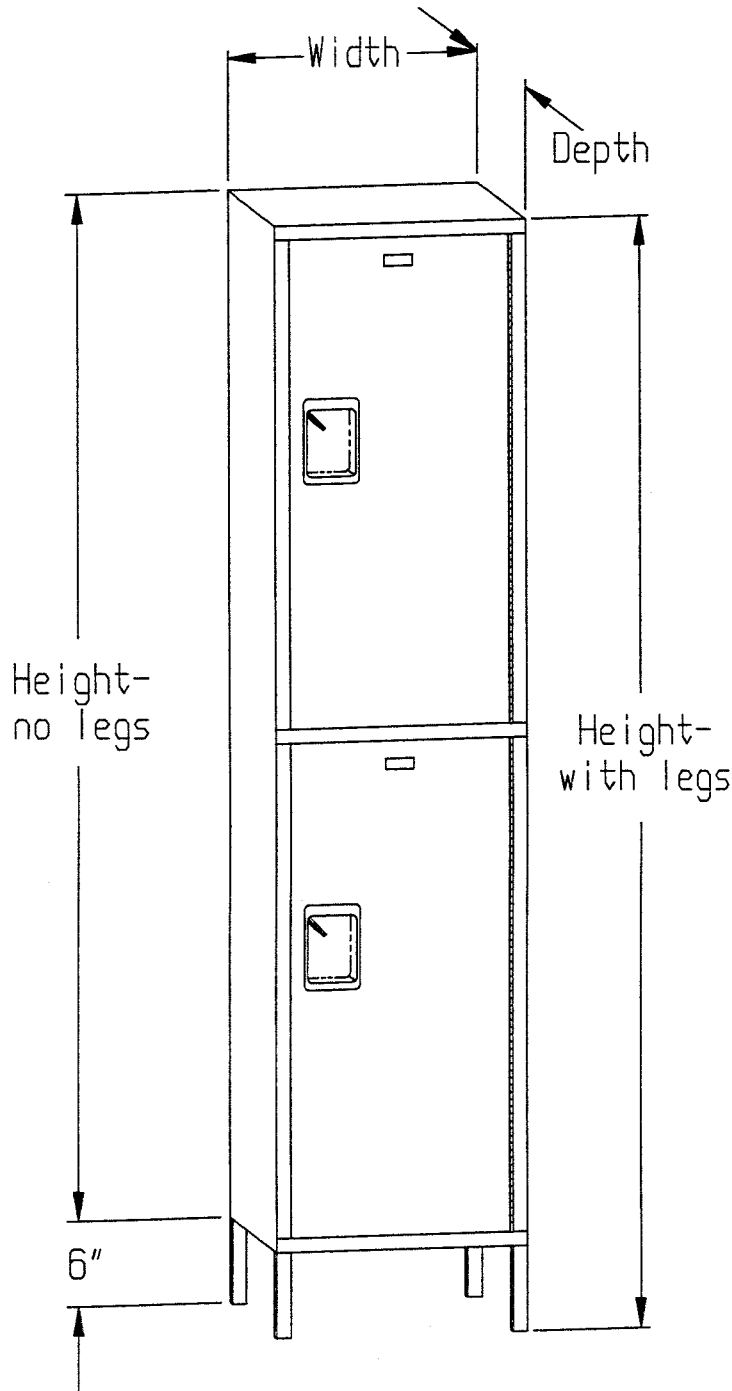

		HEIGHT WITH LEGS	
WIDTH	DEPTH	66	78
12	12		
12	15		
12	18		
15	15		
15	18		
18	18		

		HEIGHT NO LEGS	
WIDTH	DEPTH	60	72
12	12		
12	15		
12	18		
15	15		
15	18		
18	18		



# ASI STORAGE SOLUTIONS INC.

4444 Delp Street Memphis, TN 38118  
Tel: 901-312-6195 Fax: 901-312-6197  
Website: [www.asilockers.com](http://www.asilockers.com)  
E-mail: [info@asilockers.com](mailto:info@asilockers.com)

**TRADITIONAL PLUS  
COLLECTION**

**DOUBLE TIER**

DATE ISSUED: 08-08

## SPECIFICATION

**Material** - All major steel parts shall be of mild cold rolled commercial quality steel.

**Finish** - All material shall be power washed and phosphate treated for maximum finish color adhesion. All components shall be finished with a hybrid epoxy/polyester powder, electrostatically applied to ensure uniform thickness and baked to cure.

**Construction** - All lockers shall be built on a unit principle with common intermediate uprights separating units.

**Door Frames** - Shall be 16 gauge formed in a channel shape. Vertical members shall have additional flange to provide a continuous door strike. Cross frame members shall also be 16 gauge channel shaped, including intermediate cross frame member.

**Doors** - Shall be 14 gauge, channel shaped on both the lock and hinge side, with angle formations across the top and bottom. Locker doors shall have a 16 gauge full height reinforcement channel.

**Body** - Bottoms shall be 16 gauge. Tops, sides, backs and shelves shall be 24 gauge. Bolt spacing shall not exceed 9" o.c.

**Hinges** - Shall be full length 16 gauge continuous piano type riveted to both door and frame.

**Handles** - Shall be one-piece 20 gauge deep drawn stainless steel cup designed to accommodate locks.

**Latching** - Lockers shall have an 11 gauge frame hook secured to the frame. The frame hook shall have a padlock hasp protruding through the recessed handle. A rubber silencer shall be firmly secured to the frame at each latch hook.

**Interior Equipment** - Lockers 12" wide shall have three wall hooks and one ceiling hook per tier. Lockers 15" and 18" wide shall have four wall hooks and one ceiling hook.

**Number Plates** - Each locker shall have a polished aluminum number plate riveted to door face with black numerals 1/2" high.

**Color** - Doors and exposed body parts shall be selected from ASI's standard designer color range. Non-exposed body parts shall be finished in #03 Almond.

**Assembly** - All locker components shall be assembled with rivets.

**Installation** - Lockers shall be installed in accordance with ASI's installation instructions and shall be level and plumb with flush surfaces and rigid attachment to anchoring surfaces.