




# ASI STORAGE SOLUTIONS INC.

4444 Delp Street Memphis, TN 38118  
 Tel: 901-312-6195 Fax: 901-312-6197  
 Website: [www.asilockers.com](http://www.asilockers.com)  
 E-mail: [info@asilockers.com](mailto:info@asilockers.com)

**SPECIALTY  
 TRADITIONAL**

**TWO PERSON**

DATE ISSUED: 08-08

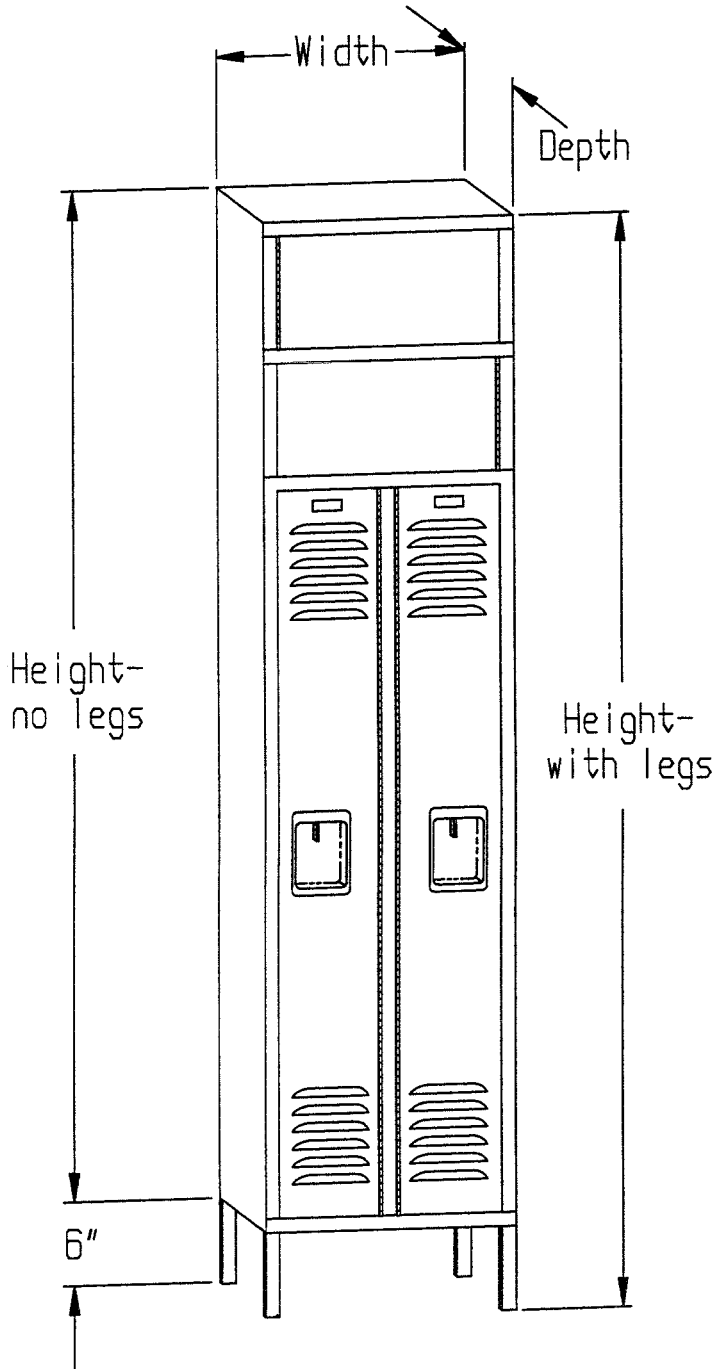

		HEIGHT WITH LEGS
		78
WIDTH	DEPTH	
15	15	
15	18	
18	18	
18	21	

		HEIGHT NO LEGS
		72
WIDTH	DEPTH	
15	15	
15	18	
18	18	
18	21	



# ASI STORAGE SOLUTIONS INC.

4444 Delp Street Memphis, TN 38118  
Tel: 901-312-6195 Fax: 901-312-6197  
Website: [www.asilockers.com](http://www.asilockers.com)  
E-mail: [info@asilockers.com](mailto:info@asilockers.com)

**SPECIALTY  
TRADITIONAL**

**TWO PERSON**

DATE ISSUED: 08-08

## SPECIFICATION

**Material** - All major steel parts shall be of mild cold rolled commercial quality steel.

**Finish** - All material shall be power washed and phosphate treated for maximum finish color adhesion. All components shall be finished with a hybrid epoxy/polyester powder, electrostatically applied to ensure uniform thickness and baked to cure.

**Construction** - All lockers shall be built on a unit principle with common intermediate uprights separating units.

**Door Frames** - Shall be 16 gauge formed in a channel shape. Vertical members shall have additional flange to provide a continuous door strike. Cross frame members shall also be 16 gauge channel shaped, including intermediate cross frames.

**Doors** - Shall be 16 gauge with six louvers at top and six louvers at bottom of each lower door for ventilation. Doors are channel shaped on both the lock and hinge side with angle formations across the top and bottom.

**Body** - Bottoms shall be 16 gauge. Tops, sides and backs shall be 24 gauge. Bolt spacing shall not exceed 9" o.c.

**Hinges** - Shall be full length 16 gauge continuous piano type riveted to both doors and frame.

**Handles** - Shall be one-piece 20 gauge deep drawn stainless steel cup designed to accommodate locks.

**Latching** - Lower Doors - The lifting trigger shall be 14 gauge steel, attached to the latching channel. The trigger shall have a padlock eye for use with 9/32" diameter padlock shackle. Doors to have latch clip engaging frame at three points. Locking device to be positive automatic type, whereby locker door may be locked when open, then closed without unlocking. A rubber silencer shall be firmly secured to the frame at each latch hook.  
Upper Doors - Opened by unlatching in lower compartment and can be closed independently.

**Interior Equipment** - Lockers 15" deep shall have two wall hooks per lower compartment. Lockers 18" and 21" deep shall have a coat rod and two wall hooks per lower compartment.

**Number Plates** - Each locker shall have a polished aluminum number plate riveted to door face with black numerals 1/2" high.

**Color** - Doors and exposed body parts shall be selected from ASI's standard designer color range. Non-exposed body parts shall be finished in #03 Almond.

**Assembly** - All locker components shall be assembled with rivets.

**Installation** - Lockers shall be installed in accordance with ASI's installation instructions and shall be level and plumb with flush surfaces and rigid attachment to anchoring surfaces.