




ASI STORAGE SOLUTIONS INC.

4444 Delp Street Memphis, TN 38118
 Tel: 901-312-6195 Fax: 901-312-6197
 Website: www.asilockers.com
 E-mail: info@asilockers.com

**TRADITIONAL
COLLECTION**

DOUBLE TIER

DATE ISSUED: 08-08

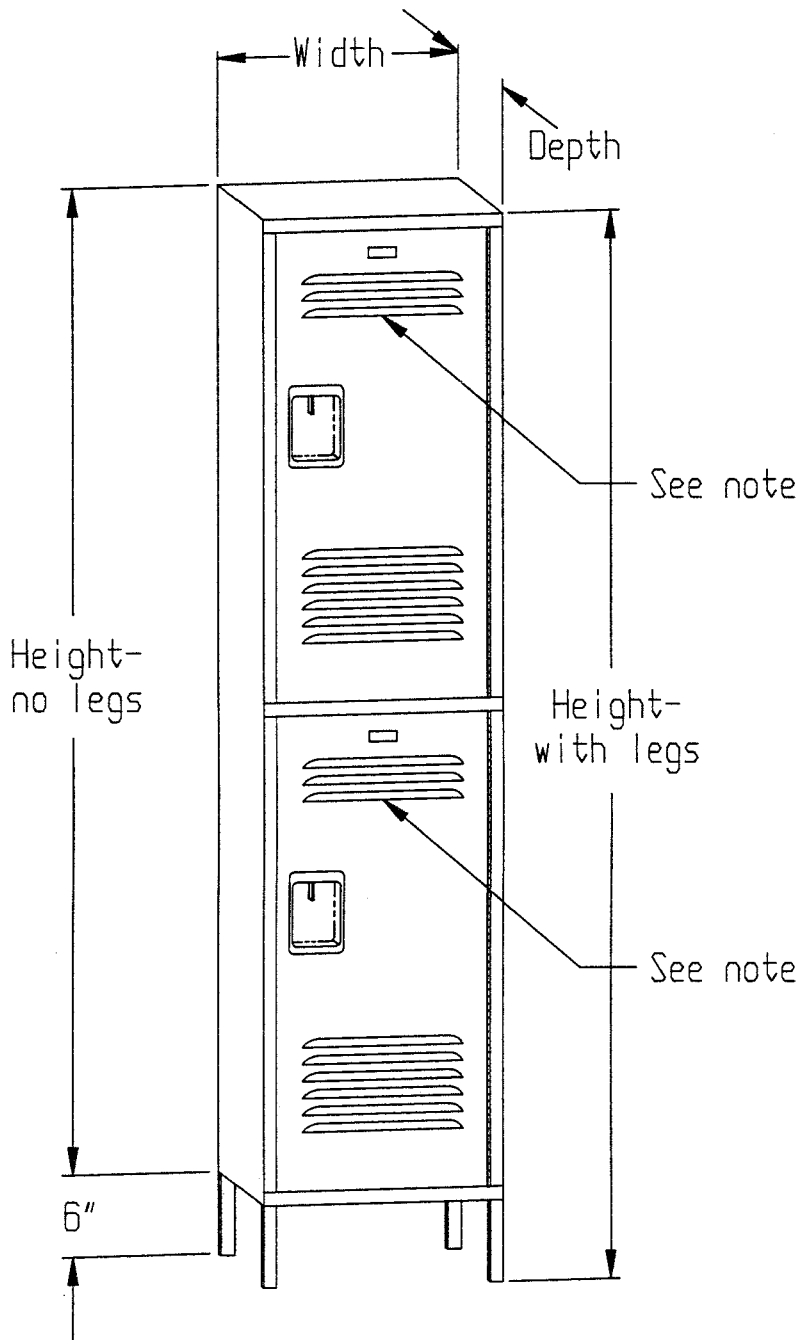

		HEIGHT WITH LEGS	
WIDTH	DEPTH	66	78
12	12		
12	15		
12	18		
15	15		
15	18		
18	18		

		HEIGHT NO LEGS	
WIDTH	DEPTH	60	72
12	12		
12	15		
12	18		
15	15		
15	18		
18	18		

NOTE: Top louvers on 72"/78" height only



ASI STORAGE SOLUTIONS INC.

4444 Delp Street Memphis, TN 38118
Tel: 901-312-6195 Fax: 901-312-6197
Website: www.asilockers.com
E-mail: info@asilockers.com

**TRADITIONAL
COLLECTION**

DOUBLE TIER

DATE ISSUED: 08-08

SPECIFICATION

Material - All major steel parts shall be of mild cold rolled commercial quality steel.

Finish - All material shall be power washed and phosphate treated for maximum finish color adhesion. All components shall be finished with a hybrid epoxy/polyester powder, electrostatically applied to ensure uniform thickness and baked to cure.

Construction - All lockers shall be built on a unit principle with common intermediate uprights separating units.

Door Frames - Shall be 16 gauge formed in a channel shape. Vertical members shall have additional flange to provide a continuous door strike. Cross frame members shall also be 16 gauge channel shaped, including intermediate cross frame member.

Doors - Shall be 16 gauge with louvers for ventilation, six louvers near each door bottom on the 60"/66" and 72"/78" tall lockers and an additional three louvers near each door top on the 72"/78" tall lockers. Doors are channel shaped on both the lock and hinge side with angle formations across the top and bottom.

Body - Bottoms shall be 16 gauge. Tops, sides, backs and shelves shall be 24 gauge. Bolt spacing shall not exceed 9" o.c.

Hinges - Shall be full length 16 gauge continuous piano type riveted to both door and frame.

Handles - Shall be one-piece 20 gauge deep drawn stainless steel cup designed to accommodate locks.

Latching - The lifting trigger shall be 14 gauge steel, attached to the latching channel. The trigger shall have a padlock eye for use with 9/32" diameter padlock shackle. Doors to have latch clip engaging frame at two points. Locking device to be positive automatic type, whereby locker door may be locked when open, then closed without unlocking. A rubber silencer shall be firmly secured to the frame at each latch hook.

Interior Equipment - Lockers 12" wide shall have three wall hooks and one ceiling hook per tier. Lockers 15" and 18" wide shall have four wall hooks and one ceiling hook.

Number Plates - Each locker shall have a polished aluminum number plate riveted to door face with black numerals 1/2" high.

Color - Doors and exposed body parts shall be selected from ASI's standard designer color range. Non-exposed body parts shall be finished in #03 Almond.

Assembly - All locker components shall be assembled with rivets.

Installation - Lockers shall be installed in accordance with ASI's installation instructions and shall be level and plumb with flush surfaces and rigid attachment to anchoring surfaces.