




ASI STORAGE SOLUTIONS INC.

4444 Delp Street Memphis, TN 38118
 Tel: 901-312-6195 Fax: 901-312-6197
 Website: www.asilockers.com
 E-mail: info@asilockers.com

**COMPETITOR
 COLLECTION**

TRIPLE TIER

DATE ISSUED: 08-08

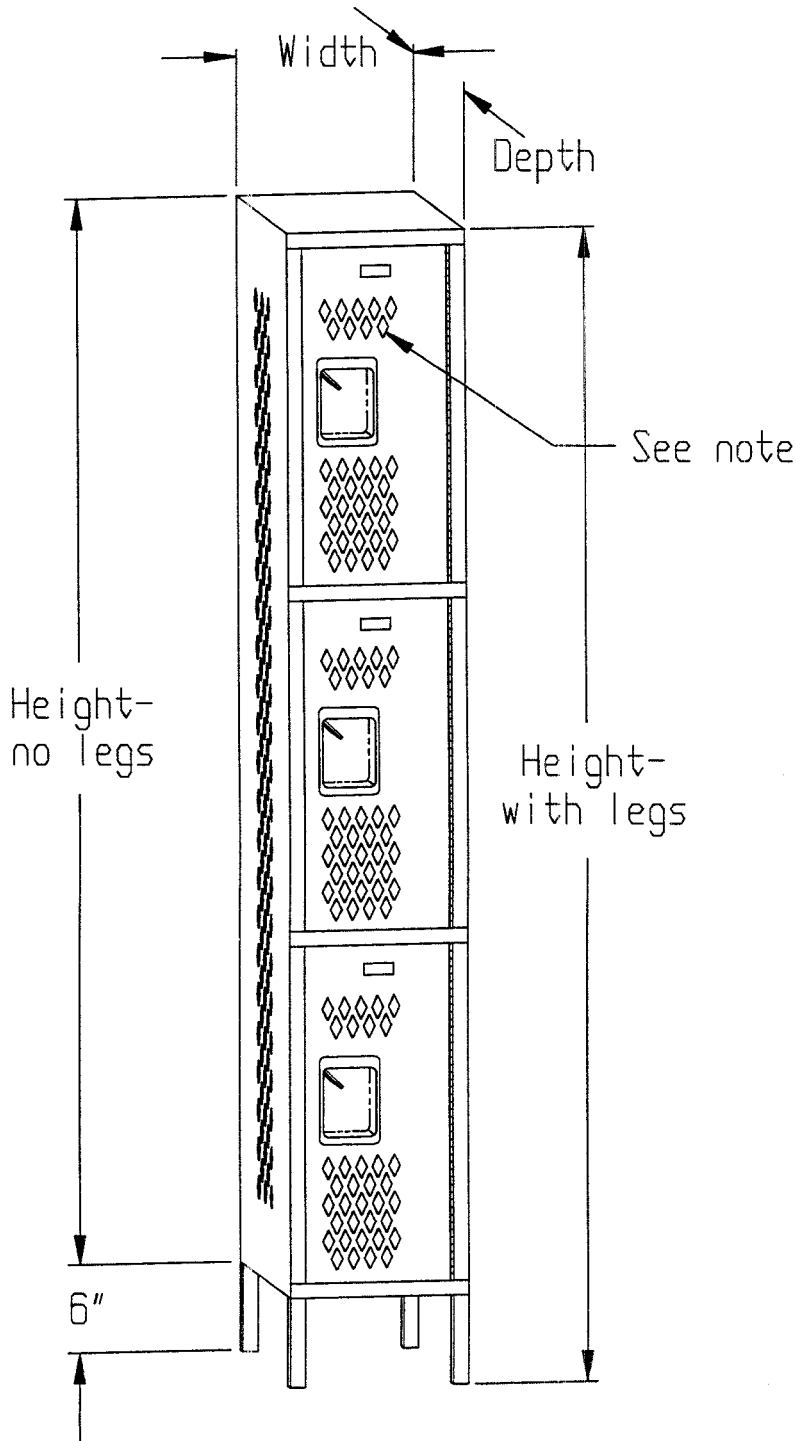

WIDTH	DEPTH	HEIGHT WITH LEGS	
		66	78
12	12		
12	15		
12	18		
15	15		
15	18		

WIDTH	DEPTH	HEIGHT NO LEGS	
		60	72
12	12		
12	15		
12	18		
15	15		
15	18		

NOTE: Top diamond perforations on 72"/78" height only



ASI STORAGE SOLUTIONS INC.

4444 Delp Street Memphis, TN 38118
Tel: 901-312-6195 Fax: 901-312-6197
Website: www.asilockers.com
E-mail: info@asilockers.com

**COMPETITOR
COLLECTION**

TRIPLE TIER

DATE ISSUED: 08-08

SPECIFICATION

Material - All major steel parts shall be of mild cold rolled commercial quality steel.

Finish - All material shall be power washed and phosphate treated for maximum finish color adhesion. All components shall be finished with a hybrid epoxy/polyester powder, electrostatically applied to ensure uniform thickness and baked to cure.

Construction - All lockers shall be built on a unit principle with common intermediate uprights separating units.

Door Frames - Shall be 16 gauge formed in a channel shape. Vertical members shall have additional flange to provide a continuous door strike. Cross frame members shall also be 16 gauge channel shaped.

Doors - Shall be 14 gauge, channel shaped on both the lock and hinge side, with angle formations across the top and bottom. Locker doors shall have a 16 gauge full height reinforcement channel.

Ventilation - Locker sides and doors shall be perforated with diamond-shaped openings 3/4" wide X 1-1/2" high in a quantity and pattern to ensure maximum ventilation and maintain structural strength. A diamond pattern of perforations shall be near each door bottom on the 60"/66" and 72"/78" tall lockers and an additional diamond pattern of perforations shall be near each door top on the 72"/78" tall lockers.

Body - Backs shall be 18 gauge; all other body parts shall be 16 gauge. Bolt spacing shall not exceed 9" o.c.

Hinges - Shall be full length 16 gauge continuous piano type riveted to both door and frame.

Handles - Shall be one-piece 20 gauge deep drawn stainless steel cup designed to accommodate locks.

Latching - Lockers shall have an 11 gauge frame hook secured to the frame. The frame hook shall have a padlock hasp protruding through the recessed handle. A rubber silencer shall be firmly secured to the frame at each latch hook.

Interior Equipment - Lockers shall have three wall hooks per tier.

Number Plates - Each locker shall have a polished aluminum number plate riveted to door face with black numerals 1/2" high.

Color - Doors, Frames, and all body parts shall be finished in same color.

Assembly - All locker components shall be assembled with rivets.

Installation - Lockers shall be installed in accordance with ASI's installation instructions and shall be level and plumb with flush surfaces and rigid attachment to anchoring surfaces.